



# ToughTek® Fireproofing Pumps

Fireproofing Pumps with Powerful Piston Pump Technology



PROVEN QUALITY. LEADING TECHNOLOGY.

## ► **Graco ToughTek – Big Performance From a Small Sprayer**

Designed for fireproofing applications, Graco® ToughTek Fireproofing Pumps handle low, medium and high-density sprayed fire resistive materials (SFRMs), delivering them with a smooth, steady flow rate. ToughTek Pumps deliver high pressures to move materials through long hose lengths so you spend more time spraying and less time moving your equipment around the job site.



---

## Easy to operate

Designed for simple, intuitive operation, your crew will be up and running in no time.

- Plug and play – the ToughTek F340e pump plugs into a standard 120V wall outlet
- Variable speed control – dial in the exact speed needed
- Optional remote start/stop switch – lets the nozzle man start or stop the pump

## Compact, portable and easy to move

The ToughTek Fireproofing Pump's compact design and small footprint makes it easy to transport onto the jobsite. Take it anywhere – doorways, halls and elevators. ToughTek Fireproofing Pumps fit into tight spaces so you can spray with ease.

## Materials

---

*Low, medium and high density fireproofing including:*

- Gypsum-based SFRMs
- Cementitious SFRMs

## Applications

---

- Onshore oil
- Gas and chemical processing facilities
- Industrial structures
- Commercial buildings
- Floor and roof assemblies, steel beams, joists and columns

## ► Save Money With Overall Durability

---

The ToughTek Fireproofing Pump's durable piston pump stands up to highly abrasive fireproofing materials. Its quick knockdown design makes maintenance fast and easy. You eliminate the frequent expense of replacing pump parts.



*ToughTek F680e Fireproofing Pump*



*Pivoting Pump Lower*

- For easy maintenance



### **Easy to Clean Hopper**

- Rugged polyethylene construction
- 20 gal (76 L) capacity

### **Compact and Portable**

- Easy to move

### **Variable Speed**

- Dial in the exact speed needed, from low to high volume output

### **Optional Integrated Compressor**

- Tankless 110V or 240V
- 5 CFM @ 40 psi continuous output

### **Low Power Requirements**

- Plugs into standard 120V wall outlet
- No electrician or rewiring needed

### **Hose Cam and Groove Connection**

- For fast, easy assembly

### **Pump Lower**

- Designed for heavy materials, rugged steel construction
- Quick knockdown

### **Optional Remote On/Off Switch**

- Start or stop the pump at the nozzle

### **Tool-less Hopper Removal**

- Disconnects in seconds to clean

### **Flat Proof Tires**

- Withstand the worst jobsite debris

*Ideal for difficult-to-reach locations, the compact ToughTek F340e Portable Fireproofing Pump is a rugged, dependable workhorse for fireproofing materials.*

## ► Which System is Right For You?

The Graco ToughTek Fireproofing pumps are available in two models, the F340e and the F680e. Depending on your job requirements, Graco has the right pump to fit your needs.



	F340e	F680e
<b>Pump type</b>	2-ball piston	2-ball piston
<b>Max working pressure</b>	600 psi (41 bar, 4.1 MPa)	500 psi (34 bar, 3.4 MPa)
<b>Max spray pressure</b>	500 psi (34 bar, 3.4 MPa)	500 psi (34 bar, 3.4 MPa)
<b>Max output (bags/hour)*</b>	Up to 15	Up to 25
<b>Max output**</b>	6.5 gpm (24 lpm)	10.8 gpm (41 lpm)
<b>Volume control</b>	Variable	Variable
<b>Max hose length</b>	100 ft (30.5 m)	300 ft (91.5 m)†
<b>Conveying distance - vertical</b>	Up to 50 ft (15 m)	Up to 200 ft (61 m)
<b>Hopper capacity</b>	20 gal (76 L)	30 gal (114 L)
<b>Hopper opening (W x D)</b>	22.5 x 14 in (57 x 36 cm)	20.5 x 27.5 in (52 x 70 cm)
<b>Hopper/filling height</b>	26 in (66 cm)	26 in (66 cm)
<b>Pump outlet size</b>	1 in cam groove (m)	1.5 in cam groove (m)
<b>Dimensions (L x W x H)</b>	45.5 x 24 x 38 in (116 x 61 x 97 cm)	62.25 x 33 x 46 in (158 x 84 x 117 cm)
<b>Weight</b>	210 lb (95 kg) (without hose and applicator)	625 lb (284 kg)
<b>Chemical compatibility</b>	Water based materials	Water based materials
<b>Max air compressor pressure</b>	55 psi (3.8 bar, 0.38 MPa)	75 psi (5.2 bar, 0.52 MPa)
<b>Max air compressor flow</b>	5 cfm (compressor models only)	10 cfm (compressor models only)
<b>Air compressor outlet size</b>	1/4 in QD (f) fitting	1/4 in QD (f) fitting
<b>Wetted parts</b>	SST, aluminum, carbide seats, plated steel, PTFE, UHMWPE, LLDPE, urethane, solvent-resistant elastomer	
<b>Remote on/off switch</b>	Optional	Included
<b>Air compressor</b>	Optional	Optional
<b>Manual</b>	3A3109	3A3110

\* Tested with high density cementitious fireproofing material. Performance will vary based on material, mix consistency, hose size and other factors. Check with material suppliers or contact your Graco distributor for a demonstration. \*\* Theoretical † Hose length comprised of 1.5 in dia x 200 ft (61 m) + 1.25 in dia x 50 ft (15 m) + 1 in dia x 50 ft (15 m)

# Ordering Information

---

## ToughTek F340e Portable Pumps

*F340e Packages include: 50 ft (15 m) hose and 24Y619 pole applicator. All F340e units include material hopper.*

25A500	F340e bare, 120V, 15A, 1-ph	25A550	F340e bare, w/air compressor, 120V, 15A, 1-ph
25A501	F340e pkg, 120V, 15A, 1-ph	25A551	F340e pkg, w/air compressor, 120V, 15A, 1-ph
25A502	F340e bare, w/remote on/off switch, 120V, 15A, 1-ph	25A552	F340e bare, w/remote & air compressor, 120V, 15A, 1-ph
25A503	F340e pkg w/remote on/off switch, 120V, 15A, 1-ph	25A553	F340e pkg, w/remote & air compressor, 120V, 15A, 1-ph

## ToughTek F680e Pumps

*F680e Packages include: 75 ft (23 m) hose and 24Y619 pole applicator. All F680e units include remote on/off switch and material hopper.*

24Y500	F680e bare, w/ air compressor, 230V, 30A, 1-ph	24Y504	F680e bare, w/ air compressor, 400V, 16A, 3-ph
24Y501	F680e pkg w/ air compressor, 230V, 30A, 1-ph	24Y505	F680e pkg w/ air compressor, 400V, 16A, 3-ph
24Y502	F680e bare, no air compressor, 230V, 18A, 1-ph	24Y506	F680e bare, no air compressor, 400V, 16A, 3-ph
24Y503	F680e pkg, no air compressor, 230V, 18A, 1-ph	24Y507	F680e pkg, no air compressor, 400V, 16A, 3-ph

## Parts and Accessories

17G550	1 in hose, 25 ft (7.5 m), 1000 psi max working pressure	17G554	F340e remote switch kit
17G551	1.25 in hose, 50 ft (15 m), 750 psi max working pressure	24Y479	F680e forklift stabilization kit
17G552	1.5 in hose, 50 ft (15 m), 750 psi max working pressure	25A930	F340e air compressor kit, 120V
17G767	Hose adapter (connects 1 in hose to 1.25 or 1.5 in hose)	25A931	F340e air compressor kit, 240V

## Recommended Repair Parts

17H194	Outlet check valve	16W510	Carbide inlet seat with o-ring
17H193	Pump inlet elbow	17H191	Piston seat with o-ring
17H242	Pump rebuild kit (all soft seals and check balls)	17H197	Remote On/Off Switch with 100 ft (30 m) cable

## AMERICAS

### MINNESOTA

Worldwide Headquarters  
Graco Inc.  
88 -11th Avenue N.E.  
Minneapolis, MN 55413

### MAILING ADDRESS

P.O. Box 1441  
Minneapolis, MN 55440-1441  
Tel: 612-623-6000 Fax: 612-623-6777

## EUROPE

### BELGIUM

Graco BVBA  
Industrieterrein-Oude Bunders  
Slakweidestraat 31  
B-3630 Maasmechelen,  
Belgium  
Tel: 32 89 770 700 Fax: 32 89 770 777

## ASIA PACIFIC

### AUSTRALIA

Graco Australia Pty Ltd.  
Suite 17, 2 Enterprise Drive  
Bundoora, Victoria 3083  
Australia  
Tel: 61 3 9468 8500 Fax: 61 3 9468 8599

### CHINA

Graco Hong Kong Ltd.  
Shanghai Representative Office  
Building 7  
1029 Zhongshan Road South,  
Huangpu District  
Shanghai, 200011  
The People's Republic of China  
Tel: 86 21 649 50088 Fax: 86 21 649 50077

### INDIA


Graco Hong Kong Ltd.  
India Liaison Office  
Room 443, Level 4  
Augusta Point, Golf Course Road  
Gurgaon, Haryana, India 122001  
Tel: 91 124 435 4208 Fax: 91 124 435 4001

### JAPAN

Graco K.K.  
1-27-12 Hayabuchi  
Tsuzuki-ku  
Yokohama City, Japan 2240025  
Tel: 81 45 593 7300 Fax: 81 45 593 7301

### KOREA

Graco Korea Inc.  
Shinhan Bank Building  
4th Floor #1599  
Gwanyang-Dong, Dongan-Ku,  
Anyang-si, Korea 431-060  
Tel: 82 31 476 9400 Fax: 82 31 476 9801

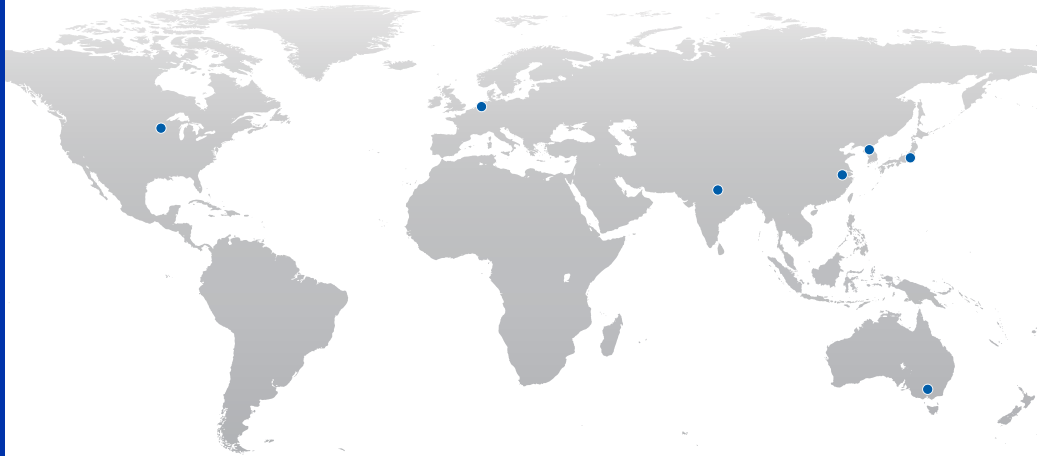

# Graco Has You Covered

## Facilities Worldwide for Global Support



### Quality First

At Graco we pride ourselves on providing best-in-class products. Engineered solutions are manufactured in our own facilities, with the highest standards in the industry. We provide you with world-class customer support and expertise to help solve your application challenges.



### Global Reach

Graco has facilities across the globe to provide you with the products and service you need, where you live. Plus, Graco has dedicated field experts in all areas of the world to support the products we sell.



### Product Capabilities

Graco has a broad range of products that are engineered and tested to perform in the harshest environments so you can be certain your equipment is protected and working at peak performance.



Contact us today!

Call **866-361-5959** to talk with a Graco representative,  
or visit [www.graco.com/toughtek](http://www.graco.com/toughtek) for more information.

